



## PRODUCT BULLETIN

### Synthetic CVT Fluid

PRODUCT #300

**CAM2 SYNTHETIC CVT FLUID** is a full synthetic transmission fluid specifically designed to provide outstanding performance in Continuously Variable Transmissions. This fluid is suitable for use as a service fill fluid for all North American CVT's coupled with engine displacement sizes 3.5 Liters or less.

CVT transmissions are very complex and unique transmissions in terms of the materials used in their construction and their operational characteristics. Therefore, to avoid or minimize the likelihood of catastrophic damage and costly repairs, these unique transmissions require fluids specifically designed for their complex and unique needs.


**CAM2 SYNTHETIC CVT FLUID** is such a fluid and was developed in conjunction with one of the world's leading additive technology leaders to provide smooth shifting and performance life for all CVT transmissions used in North American vehicles with engines sizes less than 3.5 liters.

#### **CAM2's SYNTHETIC CVT FLUIDS offer:**

- Superior Friction Control
- Superior Anti-Wear Protection
- Superior Oxidation Stability
- Compatibility in multiple CVT transmission types

#### **OTHER APPLICATIONS**

MAKE	MODEL	CVT TYPE
Audi	A4, A6	Chain
Mitsubishi	Lancer, Outlander	Belt
Nissan	Altima, Murano, Quest, Sentra SE-R, Versa SL	Belt
Saturn	Ion Quad Coupe, Vue	Belt
SUBARU	Justy	Belt
TOYOTA	All non-hybrid CVTs	Belt

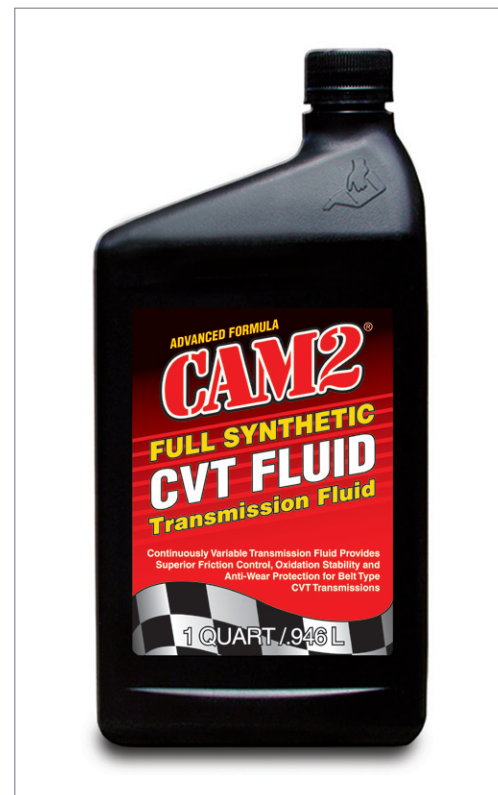

#### **CAM2 INTERNATIONAL, LLC**

211 Violet Street Suite 100 • Golden, CO 80401

Telephone 800/338-2262 • Fax: 303/679-8988

[www.CAM2.com](http://www.CAM2.com)



## PRODUCT BULLETIN

### Synthetic CVT Fluid

PRODUCT #300

**CAM2's position in using Multi-Vehicle ATF's in CVT applications is as follows:**

“Conventional multi-vehicle transmission fluids are not recommended for use by any manufacturer of CVTs nor will any additive company cover OEM warranties if Multi Vehicle ATF is used in CVT applications. Recommending use of Multi-Vehicle ATF's in CVT applications is done at your **own risk**”

#### TYPICAL PROPERTIES - CAM2 SYNTHETIC CVT FLUID

PROPERTY	TYPICAL
Gravity, API	35.6
Viscosity: CST @ 40°C CST @ 100°C	34.03 7.45
Viscosity Index	195
Pour Point: °C	-45
Flash Point °C	150
Brookfield @ -40 C	12,000
Color	Red

Contact your CAM2 representative or CAM2 distributor for additional information.